


SUNWARD

DIE WICHTIGSTEN VERBESSERUNGEN:




CE Kennzeichen

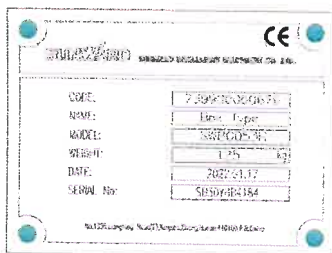

NEUE Stickstoffflasche



Verstärktes Gehäuse

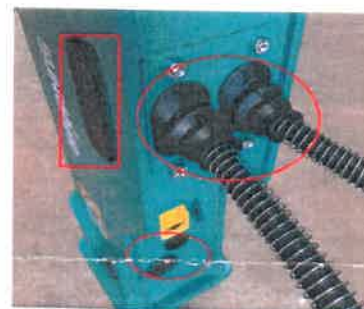

Komplett versiegelt

TECHNISCHE DATEN:

Item		Net Weight	Diameter of drill rod	Working pressure	Flow capacity	Strike frequency	Pressure in nitrogen chamber	Adaptive Sunward Excavator
Code	Specs	kg	mm	kg/cm ²	U/min	bpm	kg/cm ²	Machine model
739900000674	SWBG040H	115	40	90-120	15-25	800-1400	15-16.5	SWE08B
739900000795	SWBG045H-1	145	45	90-120	20-30	700-1200	15-16.5	SWE17F/18UF/20F
739900000675	SWBG045H	145	45	90-120	20-30	700-1200	15-16.5	SWE25UF/25F
739900000676	SWBG053H	172	53	90-120	25-50	600-1100	15-16.5	SWE35UF
739900000677	SWBG068H	339	68	110-140	40-70	500-900	15-16.5	SWE60UF
739900000656	SWBH085H	640	85	130-160	60-100	400-800	15-16.5	SWE90UF
739900000659	SWBH100H	842	100	150-170	80-110	350-700	15-16.5	SWE155F
739900000662	SWBH135H	1520	135	150-170	120-160	350-500	16.5-18	SWE215F